




**Clutch disc  
centering device**                      **400 0008 20**

**Application/vehicle type:** VW Golf 1.5–  
1.8 l, Jetta, Scirocco, Maestro, Montego.

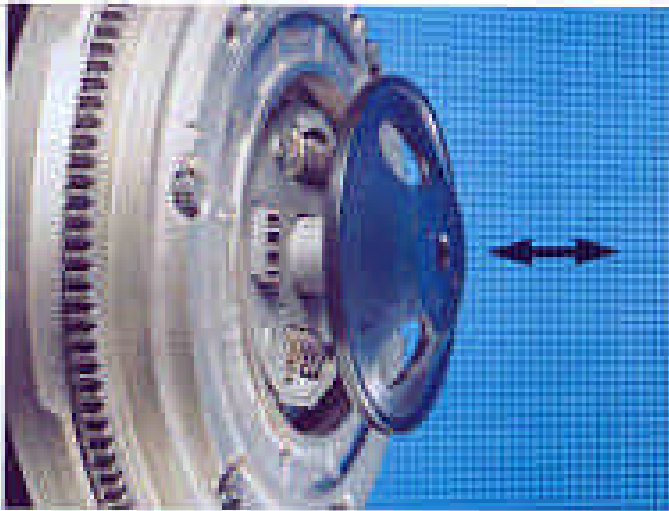

**Instructions for use:**

The special arrangement of the clutch in the VW and Austin Rover models means that it is possible to achieve perfect centering of the clutch disc during assembly with the help of this centering

device alone. After the clutch pressure plate has been fitted to the crankshaft flange, and the release plate has been fitted to the diaphragm with the securing ring, the clutch disc is placed in the correct position in the flywheel.

**Before bolting the flywheel to the clutch, the clutch disc must be precisely positioned with the help of the centering device.**

At this stage the driven plate is located in the correct installation position. The flywheel is then tightened with the required torque of 20 Nm, and the centering device is removed.